



Spare Parts & Accessories

for Mobile Vacuum System solutions.





TABLE OF CONTENTS

| | |
|-------------------------|----|
| About Us | 4 |
| DISAFLOW System | 6 |
| Hoses | 14 |
| Hose Boom Accessories | 18 |
| Filters | 19 |
| Accessories | 21 |
| Spare Parts | 22 |
| Products: | 24 |
| ECO DRIVE | 24 |
| ECO FLOW | 24 |
| Vibrator | 24 |
| Pressurizing Tank | 24 |
| Pre-Filter Package | 25 |
| Upgraded Filter System | 25 |
| Service: | 26 |
| Basic Service | 26 |
| Extended Service | 26 |
| Training: Learn to Earn | 27 |

Place your order by contacting us:
phone: +46 413-55 43 03
e-mail: lena.engfalk@disab.com

For more information, please visit www.disab.com or send an e-mail to ContactUs@disab.com.



ABOUT US

Providing Dust-Free Industrial Environments

Keeping dust and spillages under control in any industrial site is a major task, especially when it comes to maintaining process quality and achieving high standards of Health & Safety and environmental performance.

We have a long experience with vacuum technology and a great expertise in engineering solutions for various industrial applications. Our equipment is used every day to clean plant sites, remove dust and hazardous particulates, recycle spillages, transport and recycle all sort of, and sometimes valuable, materials.

Our mission is to provide dust-free industrial environments. Our vision is to be the leader in our field.

Innovation. Service. Quality.

Since 1976, DISAB has designed and manufactured market leading industrial equipment using vacuum-based technology, creating innovating and highly efficient solutions for all types of applications and industries throughout the world.

We provide our customers and business partners with innovative products and services. We ask questions and carry out research until we have the right solution needed for every single job. We are ISO 9001:2015 certified, an assurance to always focusing on meeting our customers' expectations and delivering customer satisfaction.

Separating The Useful From The Harmful

At DISAB we value customer service and always deliver proper training for our customer on how to operate our machines and systems to ensure a safe working environment.



“The combination of DISAB stationary and mobile vacuum systems resulted in a smooth, safe and cost effective solution.

Cementa Slite, Sweden

Doing so, we are pursuing a clearly defined goal: to maintain and extend our position as market leader in vacuum technology over the coming years. We believe in social responsibility and to separating the useful


from the harmful. We shape the future by developing and providing outstanding solutions to achieve higher standards of Health & Safety in working environments.



Learn From The Past But Grow Into The Future

Part of our growth and success have been to create long-term relationships, encouraging professional curiosity, and striving to make constant improvements.

Our expertise and experience when it comes to vacuum technology makes us the leader we are today. Every day we find new applications to where we can apply our knowledge and introducing vacuum technology to efficiently get the work done with a safe and cost effective solutions!

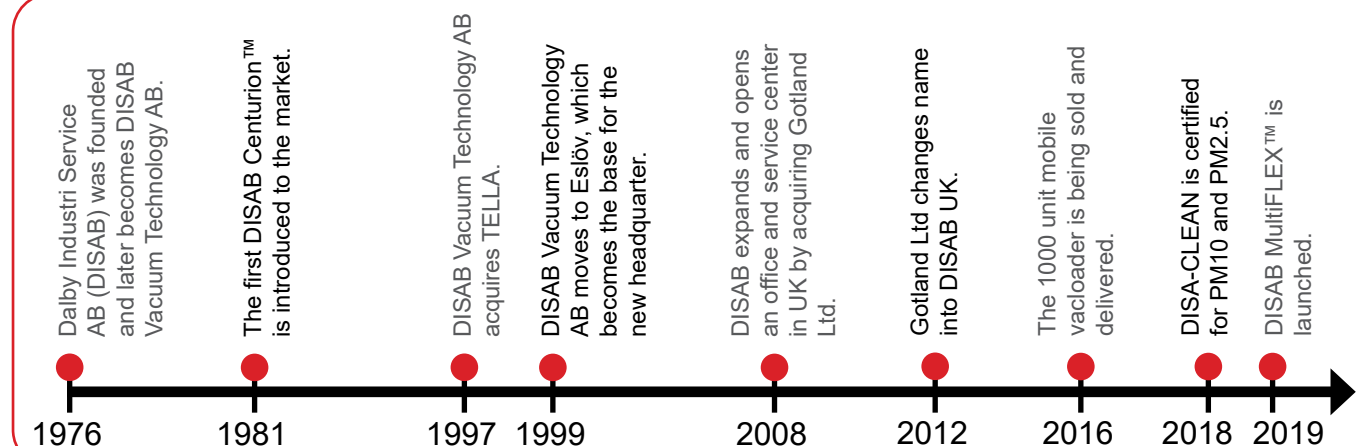

DISAFLOW - SYSTEM

DISAFLOW - the genuine coupling system


DISAFLOW is the optimum hose and coupling system if you are to build a fixed pipe or cleaning system. It is easy to handle, wearable and light. All parts (with a few exceptions) are made in galvanized steel and are available in the dimensions from 3" up to 10".

Key features:

- Fixed gaskets in all couplings.
- Increased seal capacity when sucking/blowing wet material.
- Tested for pressure up to 7 bar.
- Low flow resistance.
- Long service life.
- DISAB genuine part.



DISAFLOW - SYSTEM

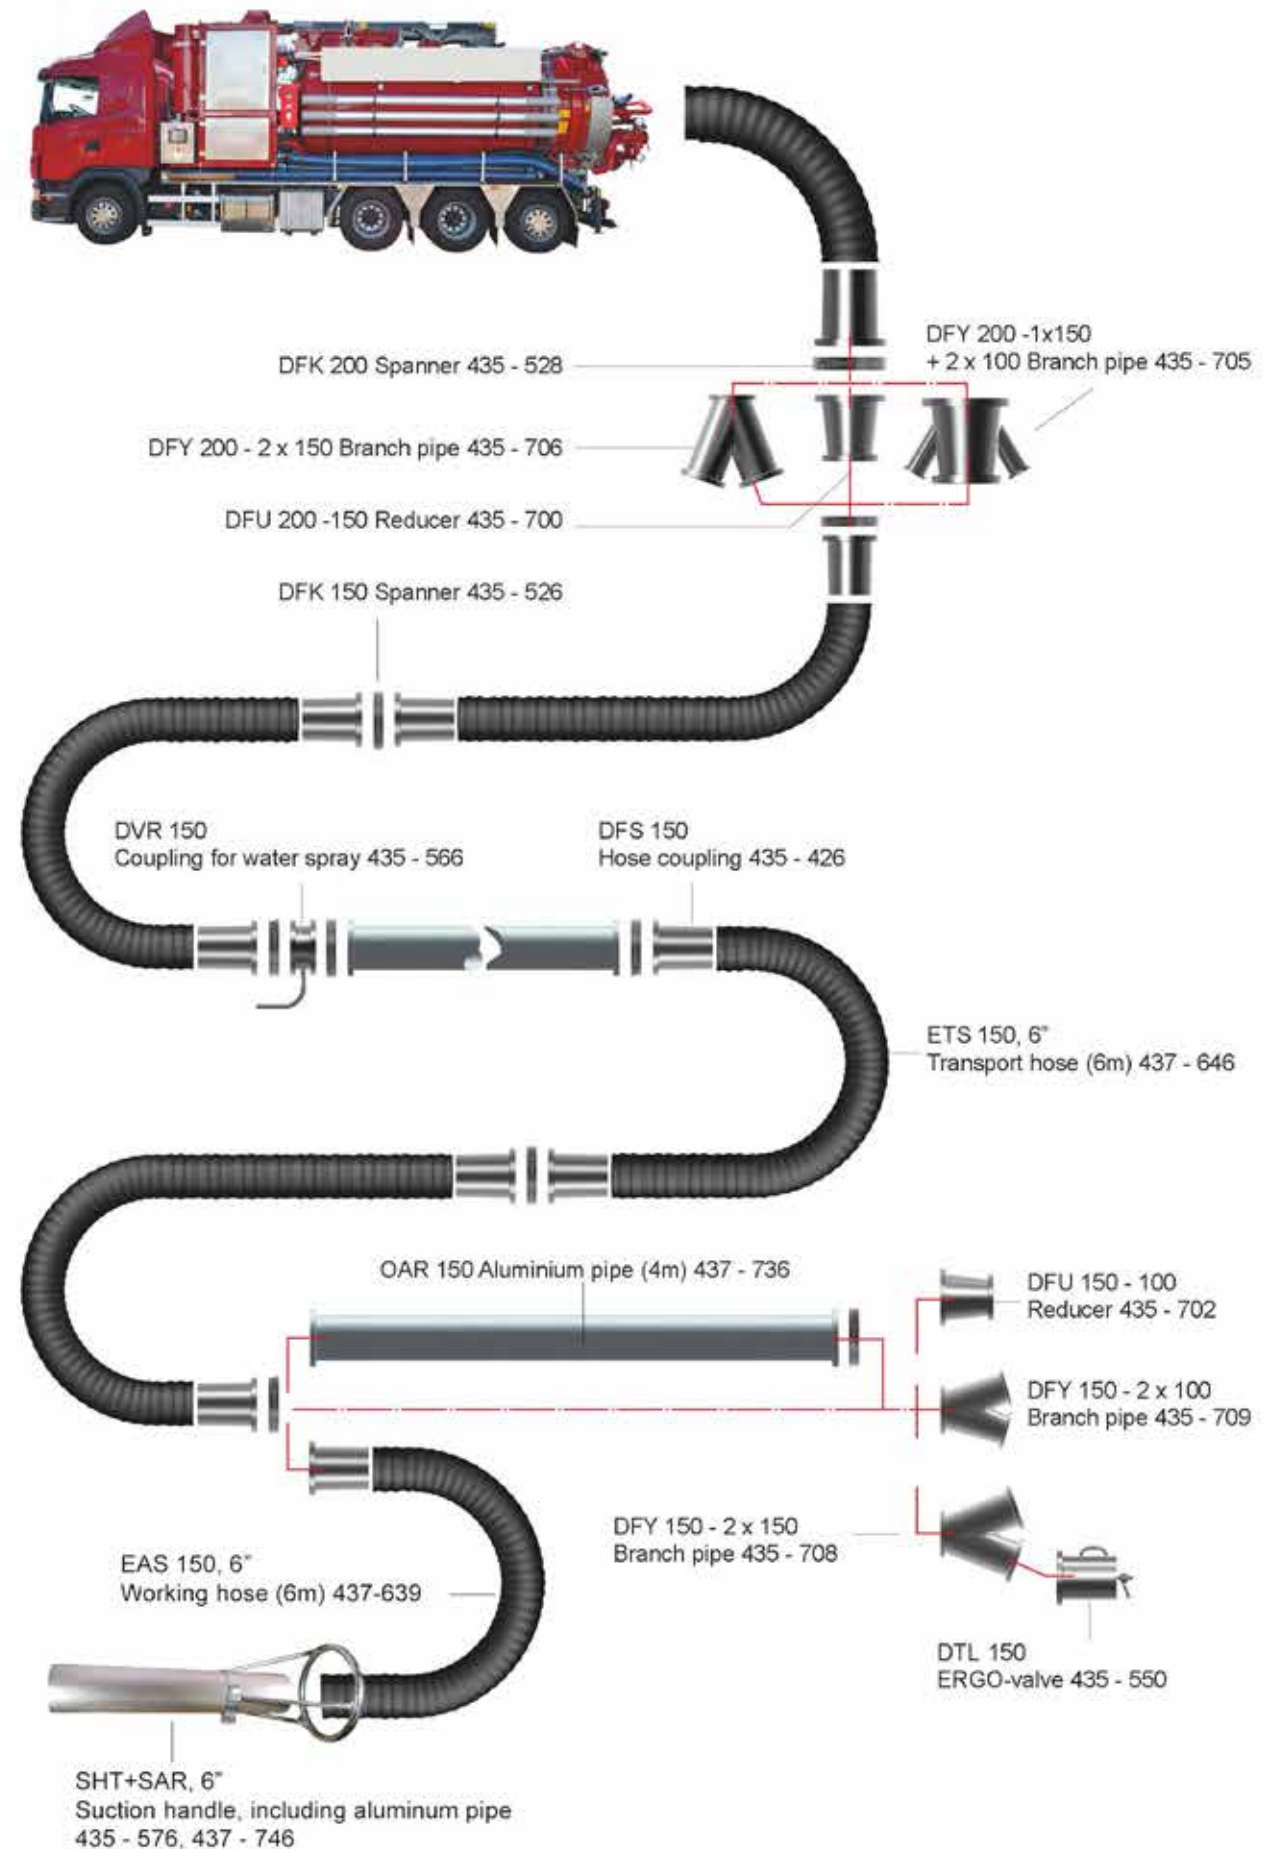

DISAFLOW - SYSTEM

DSB - Steel bend 90°

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|-----|
| 435-632 | DSB 150-090 | 150 mm | 6" |
| 435-631 | DSB 200-090 | 200 mm | 8" |
| 435-639 | DSB 250-090 | 250 mm | 10" |



DSB - Steel bend 90°

DSB - Steel bend 45°, 60°

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|-----|
| 435-636 | DSB 150-45 | 150 mm | 6" |
| 435-637 | DSB 200-60 | 200 mm | 8" |
| 435-635 | DSB 200-45 | 200 mm | 8" |
| 435-640 | DSB 250-45 | 250 mm | 10" |
| 435-647 | DSB 250-60 | 250 mm | 10" |



DSB - Steel bend 45°

DFU - Reducer

| Art. Nr. | Designation | Size | |
|----------|-------------|-----------------|----------|
| 435-704 | DFU 100/76 | 100 mm / 76 mm | 4" / 3" |
| 435-703 | DFU 125/100 | 125 mm / 100 mm | 5" / 4" |
| 435-702 | DFU 150/100 | 150 mm / 100 mm | 6" / 4" |
| 435-701 | DFU 150/125 | 150 mm / 125 mm | 6" / 5" |
| 435-700 | DFU 200/150 | 200 mm / 150 mm | 8" / 6" |
| 435-699 | DFU 250/200 | 250 mm / 200 mm | 10" / 8" |



DFU - Reducer

DFU - Reducer, stainless steel

| Art. Nr. | Designation | Size | |
|----------|-------------|-----------------|----------|
| 435-795 | DFU 125/100 | 125 mm / 100 mm | 5" / 4" |
| 435-794 | DFU 150/100 | 150 mm / 100 mm | 6" / 4" |
| 435-793 | DFU 150/125 | 150 mm / 125 mm | 6" / 5" |
| 435-792 | DFU 200/50 | 200 mm / 150 mm | 8" / 6" |
| 435-791 | DFU 250/200 | 250 mm / 200 mm | 10" / 6" |



DFU-S Reducer,
suction only

DFU-S - Reducer, only suction

| Art. Nr. | Designation | Size | |
|----------|-------------|-----------------|---------|
| 435-720 | DFU-S | 150 mm / 200 mm | 6" / 8" |
| 435-722 | DFU-S | 100 mm / 150 mm | 4" / 6" |

DISAFLOW - SYSTEM

DFY - Branch Pipe

| Art. Nr. | Designation | Size | |
|----------|---------------|-------------------|------------|
| 435-709 | DFY 150-2x100 | 150 mm - 2x100 mm | 6" - 2x4" |
| 435-708 | DFY 150-2x150 | 150 mm - 2x150 mm | 6" - 2x6" |
| 435-706 | DFY 200-2x150 | 200 mm - 2x150 mm | 8" - 2x6" |
| 435-713 | DFY 250-2x100 | 250 mm - 2x100 mm | 10" - 2x4" |
| 435-714 | DFY 250-2x150 | 250 mm - 2x150 mm | 10" - 2x6" |
| 435-715 | DFY 250-2x200 | 250 mm - 2x200 mm | 10" - 2x8" |



DFY - Branch Pipe

| | | | |
|---------|-------------------------|--------------------------------|--------------------|
| 435-705 | DFY 200-1x150 -2x100 | 200 mm - 1x150 mm -2x100 mm | 8" - 1x6" -2x4" |
| 435-707 | DFY 200-3x10 | 200 mm -3x100 mm | 8" -3x4" |

DFS - Hose Coupling with Flange

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|-----|
| 435-422 | DFS 76 | 76 mm | 3" |
| 435-423 | DFS 80 | 80 mm | 3" |
| 435-424 | DFS 100 | 100 mm | 4" |
| 435-425 | DFS 125 | 125 mm | 5" |
| 435-426 | DFS 150 | 150 mm | 6" |
| 435-428 | DFS 200 | 200 mm | 8" |
| 435-429 | DFS 250 | 250 mm | 10" |



DFS - Hose Coupling with Flange

DFS - Hose Coupling with Flange, stainless steel

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|-----|
| 435-412 | DFS 76 | 76 mm | 3" |
| 435-413 | DFS 80 | 80 mm | 3" |
| 435-414 | DFS 100 | 100 mm | 4" |
| 435-415 | DFS 125 | 125 mm | 5" |
| 435-416 | DFS 150 | 150 mm | 6" |
| 435-418 | DFS 200 | 200 mm | 8" |
| 435-420 | DFS 250 | 250 mm | 10" |

DISAFLOW - SYSTEM

DFK - Spanner, spring

| Art. Nr. | Designation | Size | |
|----------|-----------------|---------|-----|
| 435-524 | DFK 100 | 100 mm | 4" |
| 435-526 | DFK 150 | 150 mm | 6" |
| 435-528 | DFK 200 | 200 mm | 8" |
| 435-530 | DFK 250 | 250 mm | 10" |
| 435-616 | Reinforced | 150 mm | 6" |
| 435-618 | Reinforced | 200 mm | 8" |
| 435-619 | Reinforced | 250 mm | 10" |
| 446-504 | Spanner, spring | 4x75 mm | |



DFK - Spanner, spring

DFK - Spanner, stainless steel

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|-----|
| 435-664 | DFK 100 | 100 mm | 4" |
| 435-666 | DFK 150 | 150 mm | 6" |
| 435-668 | DFK 200 | 200 mm | 8" |
| 435-670 | DFK 250 | 250 mm | 10" |
| 435-686 | Reinforced | 150 mm | 6" |
| 435-688 | Reinforced | 200 mm | 8" |
| 435-690 | Reinforced | 250 mm | 10" |

DFB - Steel Cover

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|-----|
| 435-514 | DFB 100 | 100 mm | 4" |
| 435-516 | DFB 150 | 150 mm | 6" |
| 435-518 | DFB 200 | 200 mm | 8" |
| 435-523 | DFB 250 | 250 mm | 10" |



DFB - Steel Cover

DFB - Steel Cover, stainless steel

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|----|
| 435-694 | DFB 100 | 100 mm | 4" |
| 435-696 | DFB 150 | 150 mm | 6" |
| 435-698 | DFB 200 | 200 mm | 8" |

DTL - ERGO Valve - secure adequate air speed

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|----|
| 435-550 | DTL 150 | 150 mm | 6" |



Art. Nr. 435-550

DISAFLOW - SYSTEM

DVR - Water Spray to minimize dust when working with dry materials

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|----|
| 435-564 | DVR 100 | 100 mm | 4" |
| 435-566 | DVR 150 | 150 mm | 6" |
| 435-568 | DVR 200 | 200 mm | 8" |



DVR - Water Spray

DFM - Steel Coupling, including o-ring

For aluminum pipe L=540 to increase durability

| Art. Nr. | Designation | Size | Length |
|----------|--------------------|--------|-----------|
| 435-434 | DFM 100 | 100 mm | 4" |
| 435-436 | DFM 150 | 150 mm | 6" |
| 435-438 | DFM 200 | 200 mm | 8" |
| 437-761 | DFM 200 Reinforced | 200 mm | 8" 540 mm |
| 437-762 | DFM 150 Reinforced | 150 mm | 6" 540 mm |



DFM - Steel Coupling

DFV - Steel Coupling for welding, including o-ring

| Art. Nr. | Designation | Size | Length |
|----------|-------------|--------|-----------|
| 435-444 | DFV 100 | 100 mm | 4" 30 mm |
| 435-446 | DFV 150 | 150 mm | 6" 30 mm |
| 435-448 | DFV 200 | 200 mm | 8" 30 mm |
| 435-449 | DFV 150L | 150 mm | 6" 50 mm |
| 435-450 | DFV 200L | 200 mm | 8" 50 mm |
| 435-452 | DFV 250L | 250 mm | 10" 50 mm |



DFV - Steel Coupling for welding

DFV - Steel Coupling for welding, including o-ring, stainless steel

| Art. Nr. | Designation | Size | Length |
|----------|-------------|--------|-----------|
| 435-454 | DFV 100 | 100 mm | 4" 30 mm |
| 435-456 | DFV 150 | 150 mm | 6" 30 mm |
| 435-458 | DFV 200 | 200 mm | 8" 30 mm |
| 435-464 | DFV 100L | 100 mm | 4" 50 mm |
| 435-466 | DFV 150L | 150 mm | 6" 50 mm |
| 435-468 | DFV 200L | 200 mm | 8" 50 mm |
| 435-470 | DFV 250L | 250 mm | 10" 50 mm |

DISAFLOW - SYSTEM

OAR - Aluminum Pipe

| Art. Nr. | Designation | Size | Length |
|----------|-------------|-----------|--------|
| 437-733 | OAR 100 | 100 mm 4" | 6 m |
| 437-740 | OAR 125 | 125 mm 5" | 6 m |
| 437-736 | OAR 150 | 150 mm 6" | 4 m |
| 437-737 | OAR 150 | 150 mm 6" | 6 m |
| 437-738 | OAR 200 | 200 mm 8" | 4 m |



OAR

SHT - S - Suction Handle for hose

| Art. Nr. | Designation | Size |
|----------|-------------|-----------|
| 435-674 | SHT-S 100 | 100 mm 4" |
| 435-676 | SHT-S 100 | 150 mm 6" |



SHT-S

SHT - Suction Handle, low weight

| Art. Nr. | Designation | Size |
|----------|-------------|-----------|
| 435-574 | SHT 100 | 100 mm 4" |
| 435-575 | SHT 125 | 125 mm 5" |
| 435-576 | SHT 150 | 150 mm 6" |



SHT + SAR

SAR - Aluminum Pipe

For installation in handle

| Art. Nr. | Designation | Size | Length |
|----------|-------------|-----------|--------|
| 437-744 | SAR 100 | 100 mm 4" | 0,8 m |
| 437-745 | SAR 125 | 125 mm 5" | 0,8 m |
| 437-746 | SAR 150 | 150 mm 6" | 0,8 m |

Damping Box for blowing

| Art. Nr. | Designation | Size |
|----------|-------------|-----------|
| 435-843 | Damping box | 150 mm 6" |
| 435-848 | Damping box | 125 mm 5" |



Damping Box

SGA - Floor Suction Nozzle

| Art. Nr. | Designation | Size |
|----------|-------------------|------------|
| 435-600 | SGA 1200 - 150,6" | 1200 mm 6" |
| 435-601 | SGA 800 - 100,4" | 800 mm 4" |



SGA

DISAFLOW - SYSTEM

O-rings for DISAFLOW Couplings

| Art. Nr. | Designation | Size |
|----------|-------------|------------|
| 430-444 | O-ring | 6 mm - 4" |
| 430-446 | O-ring | 6 mm - 6" |
| 430-448 | O-ring | 6 mm - 8" |
| 430-452 | O-ring | 6 mm - 10" |



O-ring

Seal for KKM-KMS

| Art. Nr. | Designation | Size |
|----------|-------------|------|
| 436-130 | EPDM | 4" |
| 436-123 | EPDM | 6" |

Other Rubber Seal

| Art. Nr. | Designation | Dimension / Type |
|----------|---------------|-----------------------|
| 430-300 | Rubber seal | 25 x 25 mm / Soft |
| 430-307 | Rubber seal | 25 x 25 mm / Standard |
| 430-430 | Rubber seal | 25 x 25 mm / Hard |
| 430-325 | Hatch sealing | DISAB P-93 |

KRK - Hose Clamp

| Art. Nr. | Designation | Size |
|----------|-------------|-----------|
| 435-809 | KRK 82-88 | 76 mm 3" |
| 435-807 | KRK 106-116 | 100 mm 4" |
| 435-805 | KRK 131-140 | 125 mm 5" |
| 435-803 | KRK 160-170 | 150 mm 6" |
| 435-801 | KRK 218-226 | 200 mm 8" |



KRK

PA - RI - Hose Clamp

| Art. Nr. | Designation | Size |
|----------|-------------|------|
| 439-085 | PA-RI 85 | 3" |
| 439-120 | PA-RI 120 | 4" |
| 439-140 | PA-RI 140 | 5" |
| 439-170 | PA-RI 170 | 6" |
| 439-230 | PA-RI 230 | 8" |
| 439-260 | PA-RI 260 | 10" |



PA-RI

Available in other dimensions.

HOSE

Working Hose HD

Heavy duty working hose for vacloaders to be used at the work site. Non-conductive. Light and flexible with good wear resistance.

Working temperature -30°C to +90°C

| | | | | | |
|---|---|---|---|---|-------------|
| | | | | | Resistance |
| | | | | | Flexibility |
| | | | | | Weight |
| 0 | 1 | 2 | 3 | 4 | 5 |

Working Hose HD

| Art. Nr. | Designation | Size | |
|----------|-----------------|--------|----|
| 437-622 | TAS 150, L=20 m | 150 mm | 6" |
| 437-623 | TAS 200, L=12 m | 200 mm | 8" |
| 437-625 | TAS 100, L=20 m | 100 mm | 4" |
| 437-626 | TAS 125, L=20 m | 125 mm | 5" |



Working Hose HD

Black Working Hose HD

A very durable and smooth vacuum hose. Specially manufactured for heavy vacuum decontamination. Also for use in central vacuum cleaning and transport of other very wearing materials. Excellent work hose for both stationary and mobile units. The hose is tough on any material.

Working temperature -40°C to +80°C

| | | | | | |
|---|---|---|---|---|-------------|
| | | | | | Resistance |
| | | | | | Flexibility |
| | | | | | Weight |
| 0 | 1 | 2 | 3 | 4 | 5 |

Working Hose HD (heavy duty) / EAS1430

| Art. Nr. | Designation | Size | |
|----------|-----------------|--------|----|
| 437-527 | EAS 76, L=10 m | 76 mm | 3" |
| 437-528 | EAS 102, L=10 m | 100 mm | 4" |
| 437-529 | EAS 127, L=10 m | 125 mm | 5" |
| 437-639 | EAS 152, L=6 m | 150 mm | 6" |
| 437-530 | EAS 203, L=6 m | 203 mm | 8" |



Black Working Hose

* 5 = high resistance, high flexibility and heavy weight.

HOSE

Working Hose MD

Medium duty working hose for vacloaders to be used at the work site. Light and flexible with good wear resistance. Specially designed for light materials transport and very easy handling.

Working temperature -30°C to +90°C

| | | | | | |
|---|---|---|---|---|-------------|
| | | | | | Resistance |
| | | | | | Flexibility |
| | | | | | Weight |
| 0 | 1 | 2 | 3 | 4 | 5 |

Working Hose MD

| Art. Nr. | Designation | Size | |
|----------|-----------------|--------|----|
| 437-610 | TAS 76, L=12 m | 76 mm | 3" |
| 437-611 | TAS 100, L=12 m | 100 mm | 4" |
| 437-612 | TAS 125, L=12 m | 125 mm | 5" |
| 437-613 | TAS 150, L=12 m | 150 mm | 6" |
| 437-614 | TAS 200, L=12 m | 200 mm | 8" |



Working Hose MD

Yellow Working Hose

Very smooth vacuum- and dust cleaning hose for transport of abrasive materials. Weather resistant. Delivered with soft ends, low weight and high flexibility makes the hose easy to handle.

Working temperature -40°C to +80°C

| | | | | | |
|---|---|---|---|---|-------------|
| | | | | | Resistance |
| | | | | | Flexibility |
| | | | | | Weight |
| 0 | 1 | 2 | 3 | 4 | 5 |

Working Hose / yellow / light / EAS1427

| Art. Nr. | Designation | Size | |
|----------|-----------------|--------|----|
| 437-633 | EAS 76, L=10 m | 76 mm | 3" |
| 437-634 | EAS 102, L=10 m | 100 mm | 4" |
| 437-635 | EAS 127, L=10 m | 125 mm | 5" |
| 437-636 | EAS 152, L=6 m | 150 mm | 6" |



Yellow Working Hose

* 5 = high resistance, high flexibility and heavy weight.

HOSE

Transport Hose HD

Transport hose HD for vacloaders and stationary systems in straight or bend positions in all types of industries. Extraction and transport of abrasive materials such as sand, gravel, stone, sludge and power. Can be used for vacuum discharge. Flexible and very high abrasion resistance.

Working temperature -40°C to +90°C

| | | | | | |
|---|---|---|---|---|-------------|
| | | | | | Resistance |
| | | | | | Flexibility |
| | | | | | Weight |
| 0 | 1 | 2 | 3 | 4 | 5 |

Transport Hose HD

| Art. Nr. | Designation | Size | |
|----------|-----------------|--------|----|
| 437-621 | TTS 200, L=20 m | 200 mm | 8" |
| 437-627 | TTS 76, L=40 m | 76 mm | 3" |
| 437-628 | TTS 100, L=40 m | 100 mm | 4" |
| 437-629 | TTS 125, L=40 m | 125 mm | 5" |
| 437-630 | TTS 150, L=40 m | 150 mm | 6" |
| 437-713 | TTS 150, L=20 m | 150 mm | 6" |



Transport Hose HD



According to standard EN ISO 8031/CLC/TR 50404:2003.

Transport Hose

Flexible transport hose used as a connection line for dust cleaning and vacuum suction. Excellent to transport different materials in various environments like decontamination trucks and all types of materials in the industry.

Working temperature -40°C to +80°C

| | | | | | |
|---|---|---|---|---|-------------|
| | | | | | Resistance |
| | | | | | Flexibility |
| | | | | | Weight |
| 0 | 1 | 2 | 3 | 4 | 5 |



Transport Hose

Transport Hose / black ETS1429

| Art. Nr. | Designation | Size | |
|----------|----------------|--------|----|
| 437-646 | ETS 150, L=6 m | 150 mm | 6" |
| 437-648 | ETS 203, L=6 m | 203 mm | 8" |

* 5 = high resistance, high flexibility and heavy weight.

HOSE

Ekotrans Transport Hose MD

Very smooth suction- and pressure hose suitable as tube bending hose to be mounted in vacuum cleaning systems, material handling systems and suction and dry suction. The hose is in anti-static performance and works in fixed as well as mobile applications.

Working temperature -40°C to +80°C

| | | | | | |
|---|---|---|---|---|-------------|
| | | | | | Resistance |
| | | | | | Flexibility |
| | | | | | Weight |
| 0 | 1 | 2 | 3 | 4 | 5 |

Ekotrans Transport Hose MD / black / smooth ETS1414

| Art. Nr. | Designation | Size | |
|----------|-----------------|--------|----|
| 437-531 | ETS 76, L=40 m | 76 mm | 3" |
| 437-532 | ETS 102, L=40 m | 102 mm | 4" |
| 437-533 | ETS 127, L=20 m | 127 mm | 5" |
| 437-535 | ETS 150, L=20 m | 150 mm | 6" |



Ekotrans Transport Hose MD

Polyurethane Hose 2,0

Transport hose for vacloaders for material transport by pressure or vacuum of abrasive material e.g sand, gravel, grain and other bulk stuff. Excellent abrasion and vacuum resistance, good resistance to oils and petrols, extremely light to use.

Working temperature -40°C to +100°C

| | | | | | |
|---|---|---|---|---|-------------|
| | | | | | Resistance |
| | | | | | Flexibility |
| | | | | | Weight |
| 0 | 1 | 2 | 3 | 4 | 5 |

Polyurethane Hose 2,0 mm

| Art. Nr. | Designation | Size | |
|----------|-------------|--------|----|
| 437-543 | | 127 mm | 5" |
| 437-544 | | 152 mm | 6" |
| 437-545 | | 203 mm | 8" |



Polyurethane Hose 2,0

Blow Hose

| Art. Nr. | Designation | Size | |
|----------|--------------|--------|----|
| 437-659 | Soft, L=20 m | 127 mm | 5" |
| 437-660 | Soft, L=20 m | 152 mm | 6" |

Cyclone Hose

| Art. Nr. | Designation | Size | |
|----------|--------------------|--------|----|
| 437-514 | ID5300, "Fullflex" | 200 mm | 8" |

* 5 = high resistance, high flexibility and heavy weight.

HOSE BOOM ACCESSORIES

Option to hose boom

| Art. Nr. | Designation |
|----------|---------------------------------------|
| 231-101 | Bough protection, inlet-box hose boom |

Inlet

| Art. Nr. | Designation |
|----------|---------------------------------------|
| 231-008 | Steel bend with flange 8", reinforced |
| 231-078 | Inlet box with wear plate |
| 490-061 | Wear parts to 231-078 |

Wear Ring

| Art. Nr. | Designation | Size |
|----------|-------------|-----------|
| 435-842 | Wear Ring | 150 mm 6" |
| 435-841 | Wear Ring | 200 mm 8" |



Art. Nr. 231-101



Wear Ring



FILTER

Filter

| Art. Nr. | Designation | Material | Unit | Qty |
|----------|-------------|-------------------------------------|------|-----|
| 416-138 | Filter bag | DISAB Spark Solution | 1812 | 18 |
| 416-139 | Filter bag | DISAB Dry Solution | 1812 | 18 |
| 416-140 | Filter bag | DISAB Gore-Tex® Membrane Solution | 1812 | 18 |
| 416-155 | Filter bag | DISAB Moisture Solution | 1812 | 18 |
| 416-141 | Filter bag | DISAB Spark Solution | 32XX | 32 |
| 416-142 | Filter bag | DISAB Dry Solution | 32XX | 32 |
| 416-143 | Filter bag | DISAB Gore-Tex® Membrane Solution | 32XX | 32 |
| 416-156 | Filter bag | DISAB Moisture Solution | 32XX | 32 |
| 419-131 | Filter bag | DISAB Dry Solution | 1513 | 9 |
| 419-132 | Filter bag | DISAB Gore-Tex® Membrane Solution | 1513 | 9 |
| 419-136 | Filter bag | DISAB Gore-Tex® Antistatic Solution | 1513 | 9 |
| 419-137 | Filter bag | DISAB Moisture Solution | 1513 | 9 |
| 419-133 | Filter bag | DISAB Gore-Tex® Membrane Solution | 1513 | 6 |
| 419-134 | Filter bag | DISAB Dry Solution | 1513 | 6 |
| 419-135 | Filter bag | DISAB Gore-Tex® Antistatic Solution | 1513 | 6 |
| 419-138 | Filter bag | DISAB Moisture Solution | 1513 | 6 |
| 416-144 | Hose filter | DISAB Dry Solution | | 70 |
| 416-145 | Hose filter | DISAB Spark Solution | | 70 |
| 416-147 | Hose filter | DISAB Gore-Tex® Membrane Solution | | 70 |
| 416-151 | Hose filter | DISAB Dry Antistatic Solution | | 70 |
| 416-152 | Hose filter | DISAB Gore-Tex® Antistatic Solution | | 70 |
| 416-153 | Hose filter | DISAB Moisture Solution | | 70 |

Available in other dimensions and material.

Recommended by DISAB.



Filter bag



Hose filter

Air Filter

| Art. Nr. | Designation | Type | Application |
|----------|---------------------------|----------|-------------|
| 416-120 | Safety filter | P/DECO/Q | |
| 416-130 | Safety/Air cooling filter | LN/P | |
| 416-125 | Air cooling filter | P/DECO | |
| 416-123 | Safety filter/Hepa10 | P/DECO/Q | Asbestos |
| 416-126 | Safety filter/Hepa10 | LN | Asbestos |
| 416-137 | Safety filter/Hepa13 | P/DECO/Q | PCB |
| 416-167 | Safety filter/Hepa13 | LN | PCB |



Air Filter

FILTER

Filter Cassettes -1812, DECO

| Art. Nr. | Designation |
|----------|--------------------------------|
| 417-011 | 1122 x 970 mm, galvanized |
| 417-017 | 1122 x 970 mm, stainless steel |

Filter Cassettes -32xx

| Art. Nr. | Designation |
|----------|--------------------------|
| 417-012 | 850 x 900 mm, galvanized |

Filter Cassettes -1513

| Art. Nr. | Designation |
|----------|---------------------------------|
| 417-013 | 800 x 1100 mm, galvanized |
| 417-014 | 1140 x 1100 mm, galvanized |
| 417-015 | 1140 x 1100 mm, stainless steel |
| 417-016 | 800 x 1110 mm, stainless steel |

-1812, DECO, -32xx, -1513, Pxx, LNxx, DLxx

Support basket for hose filters

| Art. Nr. | Designation |
|----------|---------------------------------|
| 416-149 | Support basket, galvanized |
| 416-150 | Support basket, stainless steel |

Various filters

Filter for Volvo engine TWD1031

| Art. Nr. | Designation |
|----------|-----------------|
| 402-104 | Main oil filter |
| 402-106 | Fuel filter |

Filter for Volvo engine D8

| Art. Nr. | Designation |
|----------|----------------------------------|
| 402-210 | Fuel primary filter |
| 402-211 | Oil filter |
| 402-229 | Fuel fine filter cartridge |
| 402-230 | O-ring for fuel fine filter cap |
| 402-231 | Crankcase ventilation filter kit |

Filter for Volvo engine TAD 8xx

| Art. Nr. | Designation |
|----------|----------------------------|
| 402-238 | Fuel fine filter cartridge |



Filter Cassettes



Support basket for hose filters

FILTER

Filter för Caterpillar engine

| Art. Nr. | Designation |
|----------|-------------|
| 402-415 | Pre-filter |
| 402-416 | Oil filter |
| 402-417 | Fuel filter |

Hydraulic Oil Filter

| Art. Nr. | Designation |
|----------|----------------------------|
| 473-429 | Return filter Ø 130 x L140 |
| 472-143 | Return filter Ø 70 x L350 |
| 472-138 | Respiration filter |
| 472-144 | Respiration filter |
| 472-150 | Respiration filter |



Art. Nr. 473-429



Art. Nr. 472-143



Art. Nr. 472-138



Art. Nr. 472-144



Art. Nr. 472-150

ACCESSORIES

BigBag with filling and emptying pipe - Volume 840 liter

| Art. Nr. | Designation | Size |
|----------|-----------------|------------------|
| 419-200 | BigBag standard | 90 x 90 x 114 cm |



Art. Nr. 419-200

SPARE PARTS



Art. Nr. 459-583 Working light



Art. Nr. 458-435 Battery mercury



Art. Nr. 458-350 Glove, 20 m cable



Art. Nr. 458-432 Transmitter Mercury



Art. Nr. 455-158 Fitting sleeve to dry level guard (455-101)



Art. Nr. 458-486 Orbit radio



Art. Nr. 499-347 Grease cartridge



Art. Nr. 459-455 Inductive sensor

SPARE PARTS



Art. Nr. 402-211 Oil filter Volvo



Art. Nr. 461-109 Magnetic valve



Art. Nr. 462-238 Disconnecting valve



Art. Nr. 460-174 Cylinder



Art. Nr. 480-403 Butterfly valve PN10 DN150



Art. Nr. 231-099 Flange



Art. Nr. 455-101 Dry level guard

Examples of our product range, please contact us for your specific needs.
All articles are available in other dimensions and models.

PRODUCTS

ECO DRIVE 490-060

Reduces r.p.m during unload. Reduces fuel consumption and manual handling.

Benefits:

- Reduced fuel consumption.
- Environmentally friendly.
- Increase the life of the diesel engine.
- Easy to install.

ECO FLOW 490-070

Manually adjustable valve, which opens for low air flow when lightweight material is sucked.

Benefits:

- The material stays in the tank instead of the main filters.
- Reduced fuel consumption.
- Lower working temperature.
- Less filter cleaning.
- Better economy.

ERGO-VALVE is recommended in combination with ECO FLOW.

Vibrator 490-040

Pneumatic vibrators simplifies the emptying of the tank. The material is not stuck in neither the filter compartment nor the emptying hatch.

Benefits:

- Minimizes the manual cleaning of inaccessible areas.
- Easier cleaning of filter chambers.
- Reliable, non-maintenance vibrators that facilitates the daily work.

Pressurizing Tank 490-065

A smart solution of the problem to empty wet material or fine powder through the blow unit without mixing with air. The air is added in the tank.

Benefits:

- Wet material is emptied without condensation.
- Fine powder is emptied without dusting.
- Control over the emptying speed.

PRODUCTS

Pre-Filter Package 221-278

Complete set of pre-filter to be mounted in the tank at suction of lighter material such as, insulating, chips or double floor. The material will not clog the main filter but will stay in the tank.

Benefits:

- Light material will stay in the tank.
- The three filters are easy to clean and change.
- No cleaning of main filters needed.

A smart way to skip time consuming cleaning of main filters when handling light material.

Pre-filter package is recommended in combination with ECO FLOW 490-070.

Upgraded Filter System

Change of main filter from cassettes to modern hose filters. Easy to change and also easy to clean.

Benefits:

- More effective filter cleaning.
- Easier filter change.
- No contact with dirt when changed.
- Low filter load.

A complete set with bottom and top plates, clamping beams, filters and baskets.



SERVICE

Basic Service

By performing DISAB Basic Service on a regular basis when recommended, the life time of your vacloader is increased and the risk for downtime is reduced. After each Basic Service, you will receive a report on the general status of your vacloader. By following our recommendations, you could avoid potential and expensive breakdowns in the future.

Includes:

- Oil change - split-shaft, vacuum pump, engine.
- Change of - safety filter, cooling filter, air filter.
- Change of gaskets in tank and filter.
- Change of hydraulic filter, pneumatic filter.
- Inspection of fasteners (torque).
- Greasing points.
- Functional test.
- Status report.

Extended Service

Extended Service gives a thorough status on the main components of the vacloader i.e. functions of the vacuum pump, transmission, hydraulic system, electrical system and noise level.

Includes:

- Basic Service.
- Flow and condition of the vacuum pump.
- Vibration test vacuum pump / split-shaft.
- Noise level.
- Condition of the tank.
- Hydraulic flow controls.
- Optimising and adjustments.
- Extended control / check-up.
- Status report.



TRAINING

Learn to Earn

Basic training for operators, supervisors, and service technicians in how to use the DISAB vacloader in a safe and economic way.

Includes:

- Introduction in vacuum operation, blowing, and suction.
- Pressure and speed.
- Operator instructions.
- Maintenance instructions.
- Control system.
- Preventive maintenance.
- Safety.
- Economy.

After completed training session, the participants receive a certificate that declares them to have thorough knowledge in how to safely and economically operate the vacloader.

