

ACCESSORIES AND SPARE PARTS FOR STATIONARY
AND MOBILE VACUUM CLEANING SYSTEMS







## TABLE OF CONTENTS

About DISAB	2
Products	
Cleaningkit Basic	
Cleaningkit Medium	32 - 33
Cleaningkit Rubber Light	3/ - 35
Cleaningkit No Spark	34 - 35
Cleaningkit Pulk	30 - 3 <i>1</i>
Cleaningkit Bulk	აი - აა
Vacuum Cleaning Hoses	6 - 9
Accessories	
Nozzles for Telescope Pipes	 19
Floor Nozzles	
Round Nozzles	
Brush Nozzles	
Front Nozzles	
Flat NozzlesBulk Suction & Heavy Cleaning	20 27
Suction Disco for Nozzles	
Suction Pipes for Nozzles	15 - 17
Bends for Suction Pipes Accessories for Suction Pipes	14
Accessories for Suction Pipes	17
Telescope Pipes for Nozzles	
Hose Sockets	
Joint Pieces for Hoses	11
Hose Transitions	11
Swiveling Couplings	12
Suction Outlet Adaptors	13
Holders for Accessories,	
Hose Shelf and Baskets	28 - 29
Sort and Systematize	40 - 41
Hooo Couplings	
Hose Couplings	
DISAFLOW	42 - 43
Tong Couplings	44
Pipe System	
Details for Pipe System	 46 - 51
Suction Outlets	52
Spare parts	
Filters	56 - 58
Discharge, Valves	64 - 65
Various Spares	
Service	66 - 67



DISAB-TELLA AB
Cedersdalsvägen 1, 186 40 Vallentuna
Phone +46 8 514 505 70, Fax +46 8 514 505 79
industrial@disab.com • www.disab.com

# WHAT IS DISAB?

The DISAB Group is a European-wide organisation that is genuinely customer-focused and offers cost efficient solution for industries whose processes involve handling wet or dry materials, and have to deal with spillages, dust build-up, waste management or material recycling.

Based on our experience in vacuum-based technology and our expertise in designing industrial applications, the DISAB Group's equipment is used every day to clean plant, remove and recycle spillages, transport and recycle all sorts of valuable materials, and achieve higher standards of Health & Safety in our working environments.




Our mission is to provide dust-free industrial environments.

Our vision is to be the leader in our field.



# DISAB TECHNOLOGY ACCESSORIES

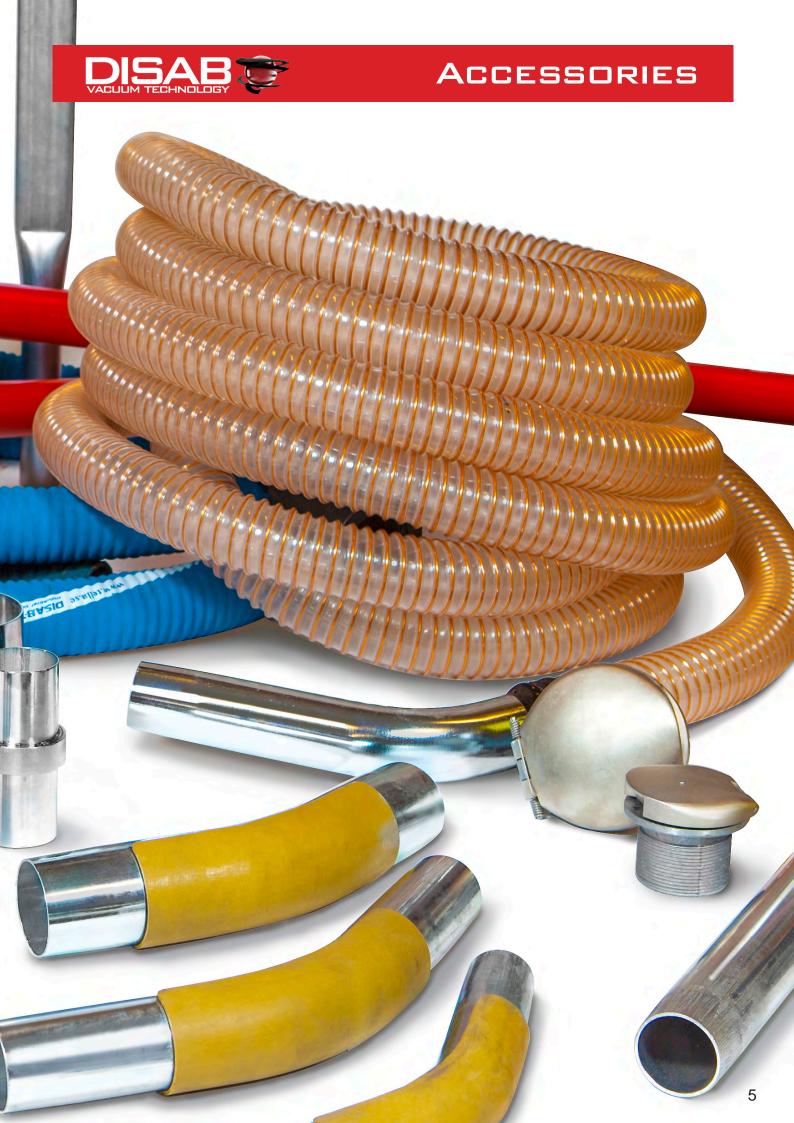




**Tella Light, blue**Suitable for normal to abrasive materials such as wood chips, concrete and limestone. Standard length 10, 15 and 20 m.

Operating temp: -30°C till +85°C.

Can be grounded.

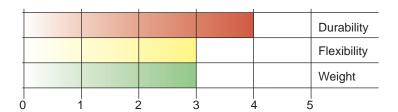


### **Disaflex**

Black Para-rubber hose with special cord, steel helix and 3mm inner wear rubber. Suitable for sludge, rocks, blaster sand etc. Also as working hose for vacloaders. Standard length 12 m.

Operating temp: -30°C till +90°C.

Can be grounded.



\* 5 = strongest, most flexible, heaviest.





## Tella Light, blue

• •		
Size	Art. no	Weight
ø 51 mm	RS 1-50/2SR	0,95 kg/m
ø 60 mm	RS 1-60/2SR	1,11 kg/m
ø 76 mm	RS 1-76/2SR	1,30 kg/m
ø 102 mm	RS 1-102/2SR	1,85 kg/m



## Disaflex

Size	Art. no	Weight
ø 76 mm	010 3076	2,0 kg/m
ø 102 mm	010 3102	2,9 kg/m
ø 127 mm	010 3127	3,9 kg/m
ø 152 mm	010 3152	4,5 kg/m






### **Vibratan**

Vibratan is lighter than the rubber hoses and works well with abrasive materials but with somewhat lesser durability. Suitable for e.g. pellets plants and bakeries.

Standard length 10 m.

Operating temp: -40°C till + 90°C.

Can be grounded.

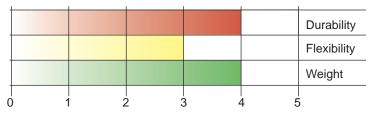


### **Tellatan**

Very smooth and flexible hose suited for most common cleaning chores. Frequently used in bakeries and general cleaning at power and process plants.

Standard length: 10 m.

Operating temp: -40°C till + 90°C.

Can be grounded.

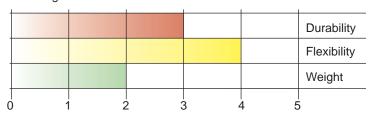

### **Vibraflex**


Very smooth and flexible hose suited for most cleaning tasks.

Frequently used in bakeries, power plants and other process facilities for general cleaning purposes.

Standard length: 15m.

Operating temp: -40°C till +60°C

Antistatic.

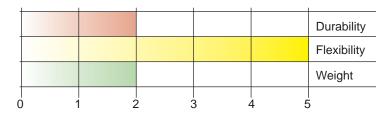

<sup>\* 5 =</sup> strongest, most flexible, heaviest.





### **Vibratan**

Size	Art. no	Weight	
ø 38 mm	007 0038	0,46 kg/m	
ø 51 mm	007 0051	0,71 kg/m	
ø 60 mm	007 0060	0,84 kg/m	
ø 76 mm	007 0076	1,06 kg/m	
ø 102 mm	007 0102	1,48 kg/m	



### Tellatan

Size	Art. no	Weight
ø 38 mm	RS 1-38/PREAF	0,39 kg/m
ø 51 mm	RS 1-50/PREAF	0,45 kg/m
ø 60 mm	RS 1-60/PREAF	0,50 kg/m
ø 76 mm	RS 1-76/PREAF	0,61 kg/m



### Vibraflex

Size	Art. no	Weight
ø 38 mm	006 0038	0,29 kg/m
ø 51 mm	006 0051	0,42 kg/m
ø 60 mm	006 0060	0,54 kg/m



# Accessories



# HOSE SOCKETS



### **Hose Socket Vibratan**

Size	Art. no	
ø 38 mm	053 0038	
ø 50 mm	053 0051	
ø 60 mm	053 0060	
ø 76 mm	053 0076	
ø 102 mm	053 0102	

Hose sockets in polyurethane suitable to all Tella working hoses in polyurethane.



### **Hose Socket Vibraflex**

Size	Art. no
ø 38 mm	054 0038
ø 50 mm	054 0051

Hose sockets suitable to Vibraflex-hose.



### **Hose Socket**

Size	Art. no
ø 38 mm	RS 30-38/J

Hose sockets in plastic with aluminium socket, to inside assembly on hose. Suitable to all 38 mm hoses.





# **JOINT PIECES FOR HOSES**





# Joint Piece for Hose steel

Size	Art. no	
ø 38 mm	445100	
ø 50 mm	445150	
ø 60 mm	445200	
ø 76 mm	445250	
ø 102 mm	445300	
ø 127 mm	445350	
ø 152 mm	445400	

Joint piece for hose in steel.

# HOSE TRANSITIONS



# Hose Transition for Hose, steel

Size	Art. no	
ø 38/50 mm	RS 38-50	Hose Transition for Hose in steel.





# Hose Transition for Hose, steel

Size	Art. no
ø 50/60 mm	450100
ø 50/76 mm	450150
ø 60/76 mm	450200
ø 76/102 mm	450250
ø 102/127 mm	450300
ø 102/152 mm	450350
ø 127/152 mm	450450

Hose Transition for Hose in steel.

# ACCESSORIES



# SWIVELING COUPLINGS



## **Swiveling Coupling, steel**

Size	Art. no	
ø 38 mm	RS 32-38/M	Swivelling Coupling in steel.
ø 51 mm	RS 32-50/M	
ø 60 mm	RS 32-60/M	
ø 76 mm	RS 32-76/M	



### **Swiveling Coupling, nylon**

Size	Art. no	
ø 38 mm	RS 32-38/N	Swivelling coupling
ø 50 mm	RS 32-50/N	in nylon. Attention! Non groundable!
ø 60 mm	RS 32-60/N	Attention: Non groundable:



### **Swiveling Coupling, plastic**

Size	Art. no	
ø 38 mm	RS 31-38	Swivelling coupling in plastic to suction hose with diameter 38 mm. Attention! Non groundable!.





# SUCTION OUTLET ADAPTORS



### **Suction Outlet Adaptor Special**

Size	Art. no	
ø 51 mm	RS 33-50/VS Special	Suction Outlet Adapter Special in antistatic rubber to suction outlet with 70 mm diameter. Suits outlets from 68 mm to 78 mm.



### **Suction Outlet Adaptor for Tella Blue 108mm**

Size	Art. no	
ø 50 mm	071 0051	Suction Outlet Adapter in
ø 60 mm	071 0060	rubber for Tella Blue suction outlet 108 mm.
ø 76 mm	071 0076	Antistatic.
ø 108 mm	071 0102	



### **Suction Outlet Adaptor for Tella Blue, 76mm**

Size	Art. no	
ø 38 mm	070 0038	Suction Outlet Adapter in
ø 51 mm	070 0051	rubber for suction outlet Tella Blue 76 mm, RS 90-60/MF
ø 60 mm	070 0060	etc.
ø 76 mm	070 0076	Antistatic.







# BENDS FOR SUCTION PIPE



### Steel Bend, standard

0.1001 = 0.1141, 0.1411.1414.14		
Art. no		
RS 31-40	Steel bend, double cones,	
RS 31-50	standard.	
RS 31-60		
	<b>Art. no</b> RS 31-40 RS 31-50	



### Steel Bend, strengthened

Groot Botta, Griotigationida		
Art. no		
RS 31-40/F	Steel bend, double cones,	
RS 31-50/F	strengthened.	
RS 31-60/F		
	Art. no RS 31-40/F RS 31-50/F	





# SUCTION PIPES FOR NOZZLES



### **Suction Pipe Aluminium**

Size	Art. no	
ø 38 mm	RS 2-40/	

Suction Pipe in aluminium, anodiced. Coned out in both ends. Length 1 m.



### **Suction Pipe Steel**

Size	Art. no
ø 50 mm	RS 2-50/4S
ø 60 mm	RS 2-60/4S

Suction Pipe in steel. Coned in respectively out. Length 1 m.



Size	Art. no
ø 38 mm	RS 2-38/1
ø 50 mm	RS 2-50/1
ø 60 mm	RS 2-60/1

Suction Pipe in aluminium. Coned in respectively out. Length 1 m.



Size	Art. no	
ø 50 mm	RS 2-50/2	Sucti

Suction Pipe in aluminium. Coned in respectively out. Length 1,2 m.



# SUCTION PIPES FOR NOZZLES



Size	Art. no
ø 50 mm	RS 2-50/3

Suction Pipe in aluminium. Coned in respectively out. Length 1,5 m.



Size	Art. no	
ø 38 mm	021 MA38	Suction Pipe in steel with
ø 51 mm	021 MA51	integrated bend.



### **Suction Pipe with reinforced suction bend**

Size	Art. no	
ø 51 mm	022 0051	Suction Pipe in aluminium
ø 60 mm	022 0060	with rubber covering and handle.



# SUCTION PIPES

### **Suction Pipe Aluminium**

Size	Art. no	
ø 76 mm	020 0076	Straight Suction Pipe in alu-
ø 102 mm	020 0102	minium, front angle. Length 1.2 m.
ø 127 mm	020 0127	Accessories: round handle
ø 152 mm	020 0152	for mounting on suction pipe
0 (		or handle by side. See pictures below.

### **Suction Pipe Aluminium**

Size	Art. no	
ø 38 mm	420140	Straight Suction Pipe in
ø 51 mm	420200	aluminium, front angle.  Length 0,5 m.
ø 60 mm	420250	Accessories: round handle
ø 78 mm	420300	for mounting on suction pipe or handle by side.
ø 102 mm	420350	See pictures below.

### **Suction Pipe Steel**

Size	Art. no	
ø 51 mm	410150	Straight Suction Pipe in
ø 60 mm	410200	steel, front angle. Length 0,5 m.
ø 76 mm	410250	Accessories: round handle
ø 102 mm	410350	for mounting on suction pipe or handle by side.
ø 127 mm	410400	See pictures below.
ø 152 mm	410450	

# ACCESSORIES SUCTION PIPES





### **Side Handle Steel**

Size	Art. no
ø 51 mm	020 5000
ø 60 mm	020 6000
ø 76 mm	020 7600
ø 102 mm	020 1020

### Handle for mounting suction pipe Aluminium

Size	Art. no
ø 76 mm	435-572
ø 102 mm	435-574
ø 152 mm	435-576

# **ACCESSORIES**






# TELESCOPE PIPE FOR NOZZLE





# Nozzles for Telescope Pipes

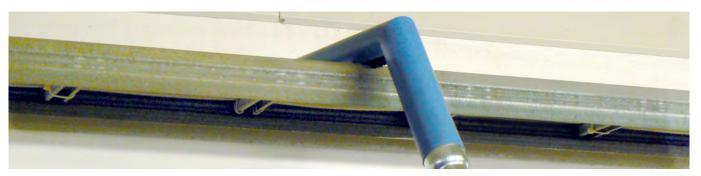



### Nozzle for suction pipe

Size	Art. no	
ø 38 mm	RS 13-50/L	Nozzle for suction pipe, in
ø 51 mm	RS 13-50/L	plastic. Diameter 200 mm.



### Nozzle for suction pipe

Size	Art. no	
ø 38 mm	RS 13-50/S	Nozzle for suction pipe, in
ø 51 mm	RS 13-50/S	plastic. Diameter 100 mm.



### **Nozzle for cable rack**

Size	Art. no	
ø 38 mm	RS 13-50/P	Nozzle for cable rack, suita-
ø 51 mm	RS 13-50/P	ble for cleaning of flat areas.



Size	Art. no	
ø 38 - 51 mm	RS 20-40/30T	Nozzle for suction pipe, steel
ø 38 - 51 mm	RS 20-40/40T	plate, with revolving top mould.
ø 38 - 51 mm	RS 20-40/60T	Width 30, 40 och 60 cm.



# FLOOR NOZZLES



### Floor Nozzle steel plate

Size	Art. no	
ø 51 mm	RS 5-50/2E	Floor Nozzle, Steel plate,
ø 60 mm	RS 5-60/2E	exchangeable link, rubber stripes and wheels. Width 55 cm.



### Floor Nozzle steel plate

	rice rice in the plants		
Size	Art. no		
ø 51 mm	RS 5-50/2D	Floor Nozzle, Steel plate,	
ø 60 mm	RS 5-60/2D	exchangeable link, rubber stripes and wheels.	
		Width 45 cm.	



### Floor Nozzle steel plate

	•	
Size	Art. no	
ø 51 mm	RS 5-50/2C	Floor Nozzle, Steel plate,
ø 60 mm	RS 5-60/2C	exchangeable link, rubber stripes and wheels.
		Width 30 cm.



### Floor Nozzle silumin with wheels

Size	Art. no	
ø 51 mm	RS 4-50/60H	Floor Nozzle, in silumin with link, exchangeable brush stripes and wheels. Width 60 cm.



### Floor Nozzle silumin with wheels

Size	Art. no	
ø 51 mm	RS 4-50/40H	Floor Nozzle, in silumin with link, exchangeable brush stripes and wheels. Width 40 cm.



# FLOOR NOZZLES



### Floor Nozzle silumin

Size	Art. no	
ø 51 mm	RS 4-50/40	Floor Nozzle, in silumin with link. Exchangeable brush stripes. Width 40 cm.



### Floor Nozzle silumin with rubber

Size	Art. no	
ø 51 mm	RS 4-50/40G	Floor Nozzle, in silumin/rub- ber with link. Exchangeable rubber and brush stripes with extra brushes. Width 40 cm.



### Floor Nozzle Tella Brush

Size	Art. no	
ø 38 mm	025 0038	Floor Nozzle Tella Brush, in
ø 51 mm	025 0051	aluminium and plastic with link. Adjustable wheels.
		Exchangeable brush stripes. Width 50 cm.



### Floor Nozzle Tella Rubber

Size	Art. no	
ø 38 mm	026 0038	Floor Nozzle Tella Rubber,
ø 51 mm	026 0051	in aluminium and plastic with link. Adjustable wheels.
		Exchangeable rubber stripes. Width 50 cm



# ROUND NOZZLES



### **Round Brush**

Size	Art. no	
ø 38 mm	RS 8-38/A	Round Brush in rubber with
ø 51 mm	RS 8-50/A	hard brush in nylon. Width 9.5 cm.
ø 60 mm	RS 8-60/A	- Widii 9,3 Giii.



### **Round Brush**

Size	Art. no	
ø 38 mm	RS 8-38/B	Round Brush in rubber with
ø 51 mm	030 0500	medium soft brush. Width 7,5 cm.



### **Round Brush**

110 0.1101 = 1 0.011		
Size	Art. no	
ø 38 mm	RS 8-38/AM	Round Brush in rubber with
ø 51 mm	RS 8-50/AM	brush in metal. Width 9.5 cm
ø 60 mm	RS 8-60/AM	Width 5,5 cm



### Brush for 030 0500

Di d311 101 030 0300	Did311 101 030 0300	
Art. no		
RS 8-50/BU	Bottom Mould to Round Brush 030 0500. Medium soft brush in nylon. Also fits RS 8-38/B.	



### Brush for RS 8-50/A

Art. no	
RS 8-50/AU	Bottom Mould to Round Brush 8-50/A. Hard brush in nylon. Also fits 8-38/A and 8-60/A.



Brush for RS 8-50/AM		
	Art. no	
	RS 8-50/AMU	Bottom Mould to Round Brush 8-50/AM. Hard brush in metal. Also fits 8-38/AM and 8-60/AM.



# HAND NOZZLES



### **Oval Brush**

Size	Art. no	
ø 38 mm	RS 52-38	Oval brush.



### **Rectangle Brush**

Size	Art. no	
ø 38 mm	RS 25-38/A	Rectangle brush. Width 7 cm.





# FRONT NOZZLES



### **Front Nozzle plastic**

	•	
Size	Art. no	
ø 38 mm	RS 27-38	Front Nozzle in plastic.
ø 51 mm	RS 27-50	Length 45 cm. Width 4,5 cm.
		Suction port 2.5 cm



Size	Art. no	
ø 38 mm	RS 27-38/LP	Front Nozzle in plastic.
ø 50 mm	RS-27-50/LP	Length 45 cm. Width 6 cm.
ø 60 mm	RS 27-60/LP	Suction port 1,5 cm.



### **Front Nozzle plastic**

Size	Art. no	
ø 38 mm	RS 24-38	Front Nozzle in plastic. Length 3,8 cm. Width 4,0 cm. Suction port 0,5 cm.



### **Front Nozzle plastic**

	•	
Size	Art. no	
ø 38 mm	RS 23-38	Front Nozzle in plastic, conical. Length 26 cm. Suction port 2,8 cm.



### **Front Nozzle rubber**

Size	Art. no	
ø 51 mm	RS 13-50/B	Front Nozzle in rubber, conical. Length 50 cm. Suction port 1,8 cm.



# FRONT NOZZLES



### **Front Nozzle rubber**

Size	Art. no	
ø 51 mm	RS 11-50	Front Nozzle in rubber. Length 50 cm. Suction port 3 cm.



### Front Nozzle rubber

Size	Art. no	
ø 51 mm	031 0500	Front Nozzle in rubber with collar, conical. Length 25 cm. Suction port 2 cm



### **Front Nozzle steel**

Size	Art. no	
ø 38 mm	RS 27-38/LMA	Front Nozzle in steel.
ø 50 mm	RS 27-50/LMA	Length 70 cm. Width 5 cm.
		Suction port 1,2 cm.

### **Front Nozzle steel**

Size	Art. no			
ø 50 mm	RS 27-50/LMB	Front Nozzle in steel.		
ø 60 mm	RS 27-60/LMB	Length 75 cm. Width 7 cm.		
		Suction port 2 cm.		



Size	Art. no	
ø 38 mm	RS 27-38/LMAL	Front Nozzle in aluminium. Length 68 cm. Width 5 cm. Suction port 1,4 cm.



# FLAT NOZZLES



### **Flat Nozzle Siliumin**

I Idt HOLL	io omanini	
Size	Art. no	
ø 38 mm	RS 3-38	Flat Nozzle Silumin, in silu-
ø 51 mm	RS 3-50	min with fixed link. Width15 cm.
ø 60 mm	RS 3-60	Width 10 cm.



### Flat Nozzle Silumin wheels

Size	Art. no	
ø 38 mm	RS 3-38/7	Flat Nozzle Silumin Wheels,
ø 51 mm	RS 3-50/7	in silumin with fixed link, without brush stripes. With
		wheels.
		Width 15 cm.



### Flat Nozzle Silumin brush

Size	Art. no	
ø 38 mm	RS 3-38/2	Flat Nozzle in silumin with
ø 50 mm	RS 3-50/2	brush stripes. Width 15 cm.



### Flat Nozzle rubber

Size	Art. no	
ø 38 mm	RS 3-38/5	Flat Nozzle with serrated
ø 51 mm	RS 3-50/5	rubber list. Width 20 cm.





# BULK SUCTION, HEAVY CLEANING



### Nozzle for bulk suction

Size	Art. no
ø 51 mm	023 0051
ø 60 mm	023 0060
ø 76 mm	023 0076
ø 102 mm	023 0102
ø 127 mm	023 0127
ø 152 mm	023 0152

### Floor Nozzle, heavy design

	,	_	•	
Size	Art. no			
ø 76 mm	026 00	76		
ø 102 mm	026 010	02		



# HOSE REEL-UP DEVICE



Hose Reel-Up Device in different models to be placed on the ceiling or wall.


Hose dimension 38-51 mm. For more information, please contact us.







# ACCESSORIES



### **Hose Shelf with Tool Holder**

Size	Art. no	
ø 38 -60 mm	RS 70-50/HM	Hose Shelf with Tool Holder
ø 76 -102 mm	RS 70-50/HS	for tools. Width 590 mm. Depth 125 - 250mm. Hight 350 mm.



### **Hose Holder with Hook**

Size	Art. no	
ø 38 -60 mm	075 0076	Hose Holder for hoses up to 60 mm, with hook.



### **Tool Basket**

Size	Art. no	
155 x 330 mm	074 0051	Tool Basket, top edge measure 155 x 330 mm. Height 300 mm.



### Tool Holder, Sendzimir-zincified

Size	Art. no	
180 mm	RS 16B	Tool Holder, 180 mm.



### Tool Holder, Sendzimir-zincified

Size	Art. no	
80 mm	RS 16A	Tool Holder, 80 mm.



### **Tool Holder**

1001 Holder		
	Art. no	
	RS 15	Holder for tools, Max 10 kg. Max diameter pipe 38 mm.

# PRODUCTS



**Hose Socket** 

DISAB have over the years delivered machines and cleaning tools to a wide variety of businesses, such as paper and pulp industry, power plants and pharmaceuticals. Building on this experience we now stock the most complete range of cleaning equipment in the industry.

To help guide you we have put together packages for different needs including everything needed to get started cleaning.

# CLEANING KIT BASIC

Very flexible system for normal cleaning. I e bakeries, pharmaceuticals and manufacturing

industries.

Floor Nozzles

Cleaning Kit Basic 38/76
Cleaning Kit Basic 51/76
Cleaning Kit Basic 60/76
Cleaning Kit Basic 51/102
Cleaning Kit Basic 60/102

Suction Pipe









# CLEANING KIT MEDIUM

A system compromising between the wear resistance of rubber hoses and the flexibility of plastic hoses. Suitable for lighter cleaning at power plants and paper and pulp industry.





# **PRODUCTS**





# CLEANING KIT RUBBER LIGHT

Suitable for heavy industry such as foundries, concrete and mines.






# **PRODUCTS**






# CLEANING KIT NO SPARK

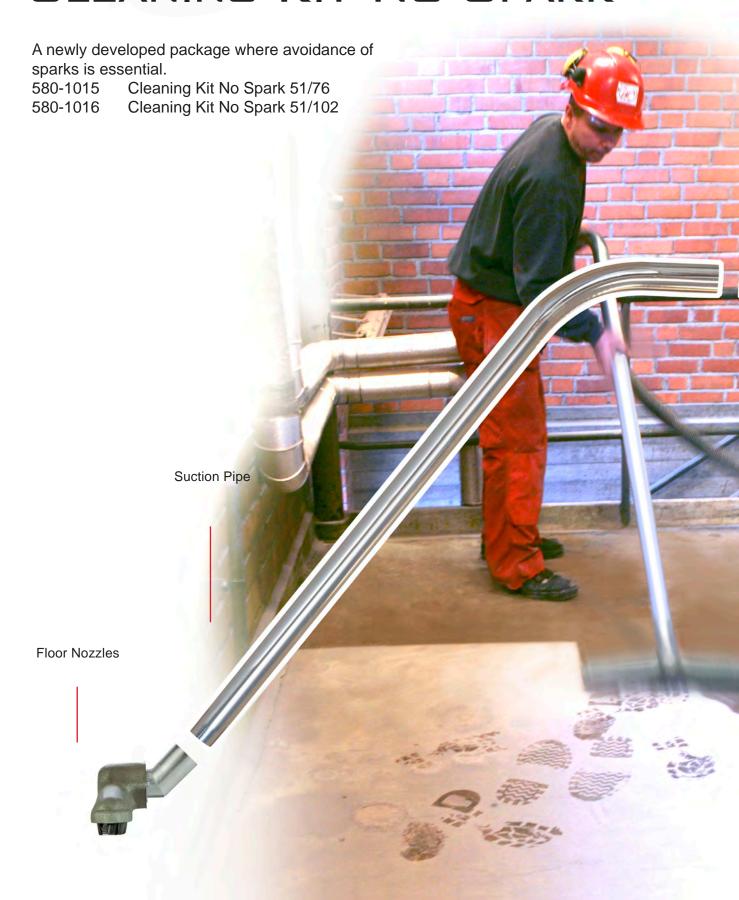



# **PRODUCTS**

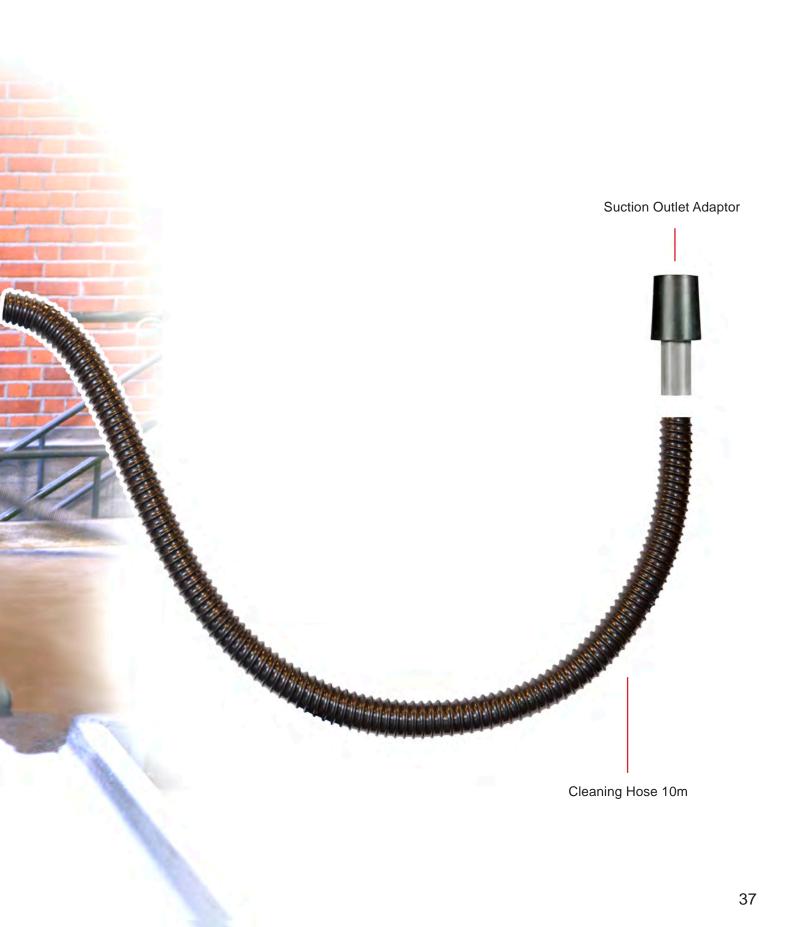



# CLEANING KIT BULK

For disposal of large volumes, i.e. around conveyors and silos.

Cleaning Kit Bulk 76/76 580-1012 Cleaning Kit Bulk 76/102 580-1013 Cleaning Kit Bulk 102/102 580-1014 Suction Pipe Side Handle







## **Accessories**







## SORT AND SYSTEMATIZE

- BETTER EFFICIENCY
- REDUCES DOWNTIME
- CREATES A BETTER WORKING ENVIRONMENT

Clearly labeled cleaning stations is a good way to enhance productivity. By systematically clean machines and workspace small deviations can be corrected before they become critical faults.

## COLOR MARKING



Color marking with heat shrink tubing makes it easier to keep apart equipment from different departments or zones.

Fits equipment and hoses in 38 and 51mm.



# Hose Couplings





## DISAFLOW



## **DFS Hose Coupling with Flange**

		_
Size	Art. no	
ø 76 mm	435-422	
ø 100 mm	435-424	
ø 125 mm	435-425	
ø 150 mm	435-426	
ø 200 mm	435-428	



## **DFK Spanner**

Size	Art. no	
ø 100 mm	435-524	
ø 150 mm	435-526	
ø 200 mm	435-528	



## **DFV Steel Coupling for welding, long**

Size	Art. no
ø 150 mm	435-449
ø 200 mm	435-450

# HOSE COUPLINGS

## DISAFLOW



## **DFV Steel Coupling for welding, short**

	. •	
Size	Art. no	
ø 100 mm	435-444	
ø 150 mm	435-446	
ø 200 mm	435-448	



#### **DSB Steel Bend, 90 degrees**

Size	Art. no
ø 150 mm	435-632
ø 200 mm	435-631



#### **DFU Reducer S 33 under DISAFLOW**

Size	Art. no
ø 100/76 mm	435-704
ø 125/100 mm	435-703
ø 150/100 mm	435-702
ø 150/125 mm	435-701
ø 200/150 mm	435-700



#### **DFB Steel Cover**

Size	Art. no	
ø 100 mm	435-514	
ø 150 mm	435-516	
ø 200 mm	435-518	



## **DFY Y-Pipe**

Size	Art. no
ø 150-2x100	435-709
ø 150-2x150	435-708
ø 200-3x100	435-707
ø 200-2x150	435-706
ø 200-1x150-2x100	435-705



# TONG COUPLINGS



## Hose Coupling, female

Size	Art. no
ø 76 mm	081 0076
ø 102 mm	081 0102
ø 127 mm	081 0127
ø 152 mm	081 0152



## Coupling for welding, male

Size	Art. no
ø 76 mm	082 0076
ø 102 mm	082 0102
ø 127 mm	082 0127
ø 152 mm	082 0152



## Hose Coupling, male

Size	Art. no
ø 76 mm	080 0076
ø 102 mm	080 0102
ø 127 mm	080 0127
ø 152 mm	080 0152



#### **Blind Cap**

p		
Size	Art. no	
ø 127 mm	084 1200	
ø 152 mm	084 1500	



# PIPE SYSTEM







#### Steel Pipes, hot-dipped galvanized

Size	Art. no
ø 76 mm	100 G076
ø 108 mm	100 G108
ø 127 mm	100 G127
ø 152 mm	100 G152

Steel Pipes, hot-dipped galvanized. Thickness 2,9 mm. Delivery in pieces of 6 m. For other dimensions, please do not hesitate to contact us.



#### Steel Pipes Sendzimir-zincified

Size	Art. no
ø 76 mm	100 2076
ø 108 mm	100 2108
ø 127 mm	100 2127
ø 152 mm	100 2152

Steel Pipes
Sendzimir-zincified
Thickness 2,0 mm.
Delivery in pieces of 6 m.
For other dimensions,
please do not hesitate to
contact us.



#### **Pipe Bend Hose**

Size	Art. no
ø 76 mm	012 0076
ø 108 mm	012 0108
ø 127 mm	012 0127
ø 152 mm	012 0152

Pipe Bend Hose Black, textile reinforced hose in rubber with steelhelix, extra strong durable rubber inside, smooth outside surface. Thickness 9 mm.





#### **Branch Pipes**

Size	Art. no
ø 76-76 mm	105 0076
ø 108-76 mm	105 0108
ø 127-76 mm	105 0127
ø 152-76 mm	105 0152
ø 108-108 mm	105 4108
ø 127-108 mm	105 4127
ø 152-108 mm	105 4152
ø 127-127 mm	105 6127
ø 152-127 mm	105 6152
ø 152-152 mm	105 8152

Branch Pipes welded, hotdipped galvanized. Thickness 2,9 mm. For other dimensions, please do not hesitate to contact us.



#### Steel Bends, long radius

	_	
Size	Art. no	
ø 76 mm	130 0076	
ø 108 mm	130 0108	
ø 127 mm	130 0127	
ø 152 mm	130 0152	

Steel Bends, long radius, hot-dipped galvanized.



#### Transitions, welded

•	
Size	Art. no
ø 108-76 mm	121 0108
ø 127-76 mm	121 0127
ø 127-108 mm	121 4127
ø 152-108 mm	121 5152
ø 152-127 mm	121 6152

Transitions, welded, hot-dipped galvanized.





=::-: : :-:9		
Size	Art. no	
ø 76 mm	131 0076	
ø 108 mm	131 0108	
ø 127 mm	131 0127	
ø 152 mm	131 0152	

End Plug, hot-dipped galvanized.



# PIPE SYSTEM TELLA EASYFIX





Size	Art. no	
150 mm	150-0020	L-formed Bracket Tella EF,
300 mm	150-0021	hot dip galvanized.
450 mm	150-0022	
600 mm	150-0023	
800 mm	150-0024	



Size	Art. no	
300 mm	150-0061	L-formed Bracket Tella EF,
600 mm	150-0062	hot dip galvanized, vertical.



#### **Bracket Walkway Tella EF**

Size	Art. no	
200 mm	870-200541	Bracket Walkway Tella EF,
400 mm	870-200543	left, Electro-zink plated, gap7.



#### **Ceiling bracket Tella EF**

Size	Art. no	
	150-0087	Ceiling bracket Tella EF, Hot-dip galvanized, for 41



#### Angle Beam clamp Tella EF 41

Size	Art. no	
	150-0064	Angle Beam clamp Tella EF, 41, Galvanized, M10 Grip.



#### **Profile Tella EF**

Size	Art. no	
2000 mm	150-0065	Profile Tella EF, Hot-dip galvanized, Holes H41.



#### **Profile Tella EF**

Size	Art. no	
200 mm	150-0070	Profile Tella EF, Electro-zink plated, Holes H62, L200.



#### Pipe Mounting Clamp Tella EF

The Mounting Glamp Tena Er			
Size	Art. no		
ø 76 mm	150-0012	Pipe Mounting Clamp	
ø 102 mm	150-0014	Tella EF.	
ø 127 mm	150-0015		
ø 152 mm	150-0016		





#### L-formed Bracket

Size	Art. no	
150 mm	150 0150	
200 mm	150 0200	
250 mm	150 0250	
300 mm	150 0300	
400 mm	150 0400	
600 mm	150 0600	
800 mm	150 0800	



#### **Z-formed Bracket, standard**

Size	Art. no	
H: 200 mm	151 0200	Z-formed Bracket Standard, galvanized.



#### Z-formed Bracket, extra wide

Size	Art. no	
B: 250 mm	151 0250	Z-formed Bracket, galva- nized.



Size	Art. no	
H: 200 mm	151 1200	Z-formed Bracket, High model, galvanized.



Size	Art. no	
2000 mm	152 2000	Bracket Profile, Standard, galvanized, delivery in pieces of 2 m.



#### **Pipe Mounting Clamp M8**

Size	Art. no
ø 76 mm	142 0076
ø 108 mm	142 0108
ø 127 mm	142 0127
ø 152 mm	142 0152











	<b>J</b>
Size	Art. no
ø 51 mm	145 0051
ø 60 mm	145 0060
ø 76 mm	145 0076
ø 108 mm	145 0108
ø 127 mm	145 0127
ø 152 mm	145 0152



Hose Clip, heavy duty

Art. no
146 0060
146 0076
146 0108
146 0127
146 0152
146 0203



#### **Jet Coupling**

Size	Art. no	
ø 76 mm	140 0076	
ø 108 mm	140 0108	
ø 127 mm	140 0127	
ø 152 mm	140 0152	
ø 203 mm	140 0203	

Jet Coupling with conductive rubber.



## SUCTION OUTLETS



#### **Tella Suction Outlet blue 76**

Size	Art. no	
ø 76 mm	162 0076	Suction Outlet, Tella original, self closing, blue. Diameter 76 mm.



#### **Tella Suction Outlet blue 108**

Size	Art. no	
ø 108 mm	162 0108	Suction Outlet, Tella original, self closing, blue. Diameter 108 mm.



#### **Suction Outlet**

Size	Art. no	
ø 60 mm	RS 60-50	Suction Outlet complete, springclosing. Suction port 60 mm.



#### **Suction Outlet**

Size	Art. no	
ø 38 mm	RS 81-38/1	Suction Outlet for mounting in hard floor. Suction port 35 mm.



#### **Suction Outlet**

Size	Art. no	
ø 38 mm	RS 76-38	Suction Outlet for mounting in wall. Suction port 35 mm.



# PIPE SYSTEM











#### Filter cartridge Venting

i iitor oartirago voritirig	
Art. no	
601 4310	Filter cartridge for venting at different discharge options.



#### **Conical Safety Filter**

Filter type	Art. no		
Cellulose	601 4500 (CK-700)	Conical Control/	
Antistatic	601 45 ANTI (CK-700 Antistat)	Safety Filter. Length 700 mm.	
Polyester	601 42PY (PE-700)	Lengur 700 mm.	
Absolute	601 5200 (ACK-700)		




## Cylindrical Safety Filter 360 mm

Filter type	Art. no	
Cellulose	601 4000 (C-360)	Cylindrical Control/Safety
Cellulose open	601 40 OPEN	Filter. Length 360 mm.
Antistatic	601 40 ANTI (C-360 Antistat)	Longin ooo miin.
Polyester	601 40PY (PE-360)	
Absolute	601 5000 (A-360)	



## **Cylindrical Safety Filter, others**

Filter type	Art. no	
Cellulose	232460 (660-18)	Cylindrical Control/
Antistatic	232460ANTI (660-18 antistat)	Safety Filter, others.
Polypropylene	601 4400 (700-8-PP)	
Absolute	601 5100 (A-700)	



Filter type	Art. no	
95 x 800 mm	230100	Filter Hose with
95 x 1500 mm	230200	rubber collar. Filter material:
		polypropylene.





## Filter Hose with rubber collar, polyester

Filter type	Art. no	
95 x 800 mm	230300	Filter Hose with
95 x 1500 mm	230350	rubber collar. Filter material: polyester,
		outside surface durable material similar to membrane.



## Filter Hose with steel ring, polypropylene

Filter type	Art. no		
117 x 800 mm	230150		Filter Hose with steel ring. Filter material: polypropyl- ene.



## Filter Hose with snap-in closing

Filter type	Art. no	
130 x 800 mm	601 08TF	Filter Hose with snap-in
130 x 1200 mm	601 12TF	closing. Filter material: coated poly-
		ester.



## Filter Hose with snap-in closing, anti-static

Filter type	Art. no	
130 x 800 mm	601 08ANTI	Filter Hose with snap-in
130 x 1200 mm	601 12ANTI	closing. Filter material: coated poly- ester. Antistatic.



#### **Support Basket, stainless steel**

Filter type	Art. no	
130x800 mm	601 2100	Support Basket for Hose
130x1200 mm	601 2200	Filter in stainless steel.
95x800 mm	230500	
95x1500 mm	230650	





## **Bag Filter Standard**

Filter type	Art. no	
1000 mm	601 0200	Bag Filter Standard in polyester needle felt.



## Bag Filter, coated

Filter type	Art. no	
1000 mm	601 1100	Bag Filter, in coated
1200 mm	601 1400	polyester fibre. Suitable when filtration requirements
1500 mm	601 1200	are extra high.



## **Bag filter Coated polyester Anti-static PFTE**

Filter type	Art. no	
1000 mm	601 1302	Bag Filter, in coated
1200 mm	601 1401	polyester/carbon fibre. Suitable when filtration require-
1500 mm	601 1305	ments are extra high.



#### **Support Basket without handles**

Filter type	Art. no	
1000 mm	601 3100	Support Basket for Filter
1200 mm	601 3500	with Jet-pulse cleaning.
1500 mm	601 3300	



#### **Support Basket with handles**

Filter type	Art. no	
1000 mm	601 3000	Support Basket with hand-
1200 mm	601 3400	les.
1500 mm	601 3200	





#### **Vacuum Indicator Tella**

Art. no

701 1200

Vacuum Indicator.



#### **Pressure Difference Switch**

Art. no

701 3316

Pressure Difference Switch, type Delta.



#### Solenoid valve for ATM

	Art. no	
230 V AC	701 3600	
24 V DC	701 3700	
12 V DC	701 3800	



#### **Thermo Coupling for Vacuum Pump**

	Art. no	
120°C	701 3400	Thermo Coupling Klixon for
130°C	701 3130	vacuum pump will disen- gage by 120°C or 130°C.

#### **Support Helix for Thermo Coupling**

Art. no

172 310814

Support Helix for Thermo Coupling of type Klixon.



#### **Level Guard**

	Art. no
220 - 240 V AC	070 2020
240 V AC ATEX	070 2020 ATEX
110 V AC	070 2021
12/24 V DC	070 2030

Level Guard of paddle type.



# TIMER



## **Delay Time Interval Control**

Performance	Art. no
24-240 V AC/DC	710-0001

Delay Time Interval Control. Adjustable working time from 0 to 10 hours.



#### **Timer for ATM-Filter Cleaning**

Performance	Art. no	
12-240 V AC/DC	710-0062	Timer for ATM-Filter Cleaning. Adjustable cleaning interval and cleaning time.





## VACUUM VALVES





Size	Art. no	
76 mm	701 0600	Connect to pipe 108 mm.



#### Vacuum Valve 152 mm

Size	Art. no	
152 mm	701 0500	Connect to pipe 152 mm.



Complete ATM valve			
	Art. no		
	604 1000	Complete valve for ATM Filter Cleaning.	



#### **Rubber Membrane for ATM Valve**

	Art. no		
	604 1200	Rubber Membrane, vulcanised rubber mem- brane for ATM Filter Clean- ing.	

#### **Sponge Rubber Sealing**

Size	Art. no
80 x 30 mm	245510

#### **Cell Rubber Stripe**

Cell Rubbe	i ourbe	
Size	Art. no	
20 x 15 mm	601 4009	
25 x 15 mm	601 6000	
15 x 8 mm	601 6008	
25 x 20 mm	601 6100	
40 x 25 mm	601 6200	
50 x 30 mm	601 6300	
25 x 15 mm	601 6400	

If you need other spare parts, 25 x 15 mm please do not hesitate to contact us.



# DISCHARGE VALVE

#### Spare parts

We have a complete range of spare parts for all our valves, such as cylinders, sealings, actuators and solenoid valves. When ordering a solenoid valve, please state the correct voltage.







## Sliding Valve

#### Size

Sizes from 50 mm up to 203 mm.

Pneumatic sliding valve with straight or pull ring edges. Are also available manually operated.



## **Butterfly Valve**

Size	Art. no
ø 150 mm	702 1300
ø 200 mm	702 1200
ø 250 mm	702 1100
ø 300 mm	702 1000

A powerful valve. Delivered complete with actuator and solenoid valve. Other options on request.



#### Flap Valve

We offer different versions of flap valves, both for discharge into Big-Bag or skip.

# SPARE PARTS Kajqoul 64









DISAB's service agreement is the best way to take control of your operating costs. Apart from the planned maintenance we also offer repair due to wear and tear.

We at DISAB have a vision to satisfy our customers highly set demands on reliability and service life. We carry out service and provide spare parts for our own products under the brands TELLA, DISAB and VIBRAMAT. We can also offer the same for other brands.

Together, we work out an agreement that will suit you and your operation. Whether it's a small inspection service or the whole range together with education and extended service, it's your choice.

A service agreement gives you a higher reliability and an increased safety through preventive measures. The condition of your vacuum equipment is continuously documented and therefore you can minimize the risk of unnecessary stoppage. Worn components can be changed or overhauled before they cause problems.

A service agreement is carried out with an interval set by you to suit your business. It could be once annually or several times per year. It can contain everything from an inspection of the equipment before a planned standstill, to a total service of the complete vacuum system.

Depending on the agreement, from a complete filter change to a small inspection, you will always have a grip of the condition of your vacuum unit.

#### **D-TEST**

A D-Test is a good idea when you want an update on your old equipments condition.

#### Contains:

- Filter check
- safety filter
- main filter
- Check of sealing's
- Check
- filter cleaning valves
- discharge valve
- vacuum valve
- Consumption check on electric engine
- Vibration check vacuum pump
- Vacuum check
- Function control
- Status report

#### Result:

- An overall control of your equipment





#### **DISAB BASIC SERVICE**

A BASIC service is carried out with an interval set together with you to suit your equipments condition.

#### Contains:

- Oil change
- vacuum pump
- engine
- Filter change
- safety filter
- main filter
- Check of sealing's
- Check/adjustment
- filter cleaning valves
- discharge valve
- vacuum valve
- Consumption check on electric engine
- Vibration check vacuum pump
- Vacuum check and adjustment
- Function control
- Status report

#### Result:

- An optimized equipment
- Better energy economy
- More effective handling
- Minimized risk of unplanned stops

#### **DISAB EXTENDED SERVICE**

An EXTENDED service is carried out with an interval set together with you to suit your equipments condition.

#### Contains:

- Oil change
- vacuum pump
- engine
- Filter change
- safety filter
- main filter
- Check of sealing's
- Check/adjustment
- filter cleaning valves
- discharge valve
- vacuum valve
- Consumption check on electric engine
- Vibration check vacuum pump
- Vacuum check and adjustment
- Function control
- Status report
- Control of your pipe system
- Calling-out time
- Audit of cleaning accessories

#### Result:

- An optimized equipment
- Improved energy economy
- More effective handling
- Minimized risk of unplanned stops
- An optimized pipe system
- A cleaner working environment

# Notes





# NOTES





DISAB-TELLA AB +46 (0)8 514 505 70 industrial@disab.com www.disab.com **DISAB VACUUM TECHNOLOGY AB** +46 (0)413 55 43 00 mobile@disab.com www.disab.com

DISAB UK Ltd +44 (0)1737 246 649 infouk@disab.com www.disab.com